





UL514B登録コネクタ 性能は、実績のあるRBC形と同等です

NPT テーパ ストレートコネクタ




呼び	呼称品番	d mm	C mm	L mm	A mm	NPTおねじ ANSI B2.1	質量 kg
3/8	ULC-103	10.6	32	23	12	NPT 1/2	0.058
1/2	ULC-104	14.0	33	24	12	NPT 1/2	0.064
3/4	ULC-106	19.0	41	26	12	NPT 3/4	0.091
1	ULC-108	24.4	48	28	14	NPT 1	0.146
1 1/4	ULC-110	33.0	59	36	14	NPT 1-1/4	0.237
1 1/2	ULC-112	38.1	67	40	16	NPT 1-1/2	0.349
2	ULC-116	49.4	81	43	16	NPT 2	0.482

NPT テーパ 45° コネクタ

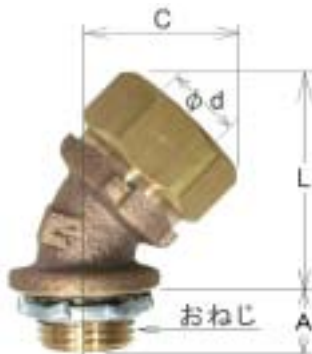

呼び	呼称品番	d mm	C mm	L mm	A mm	NPTおねじ ANSI B2.1	質量 kg
3/8	ULC-203	10.6	31	42	12	NPT 1/2	0.077
1/2	ULC-204	14.0	32	45	12	NPT 1/2	0.087
3/4	ULC-206	19.0	38	51	12	NPT 3/4	0.128
1	ULC-208	24.4	42	57	14	NPT 1	0.215
1 1/4	ULC-210	33.0	55	71	14	NPT 1-1/4	0.362
1 1/2	ULC-212	38.1	62	80	16	NPT 1-1/2	0.500
2	ULC-216	49.4	68	91	16	NPT 2	0.680

NPT テーパ 90° コネクタ



呼び	呼称品番	d mm	C mm	L mm	A mm	NPTおねじ ANSI B2.1	質量 kg
3/8	ULC-303	10.6	36	36	12	NPT 1/2	0.082
1/2	ULC-304	14.0	38	37	12	NPT 1/2	0.088
3/4	ULC-306	19.0	44	47	12	NPT 3/4	0.135
1	ULC-308	24.4	50	56	14	NPT 1	0.234
1 1/4	ULC-310	33.0	62	70	14	NPT 1-1/4	0.400
1 1/2	ULC-312	38.1	70	77	16	NPT 1-1/2	0.535
2	ULC-316	49.4	76	91	16	NPT 2	0.750

適合のニボレックスコンジット

Liquid-Tight Flexible Metal Conduit

ULV形